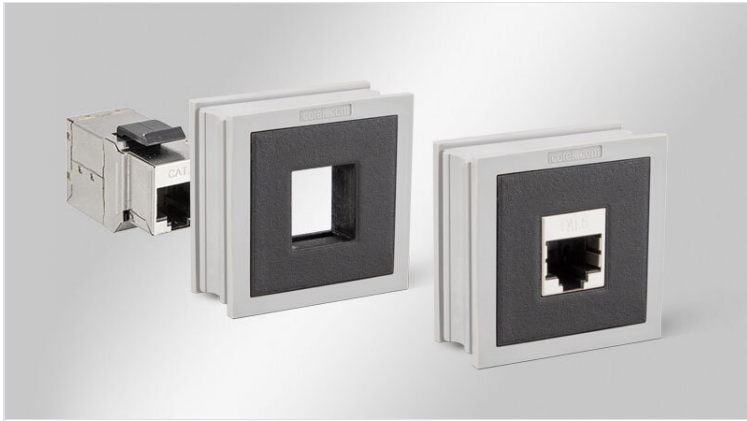


AT-KS adapter grommets

based on KT large, for Keystone couplers



The grommet AT-KS is constructed on the basis of a large KT cable grommet. The polyamide body is moulded with elastomer.

The cut-out enables a snap-in assembly of all couplers based on the Keystone system. If required the keystone couplers can be disassembled with a screwdriver.

The insertion of AT-KS into an icotek cable entry frame enables the routing of cables with and without connectors in combination with the creation of interfaces for Keystone couplers within one cable entry system. Separate cut-outs for connectors are no longer necessary.

AT-KS provides ingress protection of up to IP54 (depending on the Keystone coupler type and manufacturer).

IP54

RIWA

HL3
EN 45545-2

ECOLAB
certified

UV
ISO 4892-2A

RoHS
compliant

REACH
COMPLIANCE

Made in
Germany


Specifications


IP rating (EN 60529)	IP54
Material	Elastomer Body: Polyamide
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free


Advantages & benefits

- Connectors can be integrated directly into the cable entry frame
- Separate cut-outs for connectors are no longer necessary
- Space-saving solution
- Adapter grommet is suitable for more than 70 different Keystone jacks
- Snap-in assembly


Product types & sizes

AT-KS	Part No.	39952
	EAN	4251269321481
	Package quantity	10
	Length	42 mm
	Width	41,5 mm
	Height	19 mm
	Mounting height	2 mm


AT-KS-USB 3.0	Part No.	39968
	EAN	4251269325151
	Package quantity	1
	Length	42 mm
	Width	41,5 mm
	Height	19 mm
	Mounting height	2 mm

AT-KS-USB-C

Part No.	39981
EAN	4251269335259
Package quantity	1
Length	42 mm
Width	41,5 mm
Height	19 mm
Mounting height	2 mm

AT-KS-HDMI

Part No.	39969
EAN	4251269325168
Package quantity	1
Length	42 mm
Width	41,5 mm
Height	19 mm
Mounting height	2 mm

AT-KS-CAT6

Part No.	39970
EAN	4251269325175
Package quantity	1
Length	42 mm
Width	41,5 mm
Height	19 mm
Mounting height	2 mm