

# KEL-JUMBO

68 mm / IP54 / IP68 / UL Type 12



KEL-JUMBO flex 27-68mm

KEL-JUMBO flex


25%




(88 x 88 mm)

IP (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
	UL94-V0,
	-40 C° to 100 C°

KEL-JUMBO flex 27-48 gy

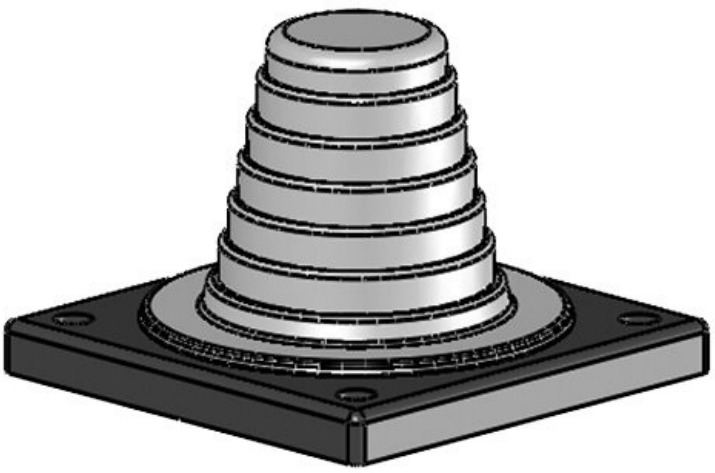

EAN	42614	88 mm
	4251269309	62 mm
	021	62 mm
	1	57,6 mm
	1	4
	48 mm	6,9 mm
	(RAL 7035)	1 x 27 - 48 mm
	88 mm	

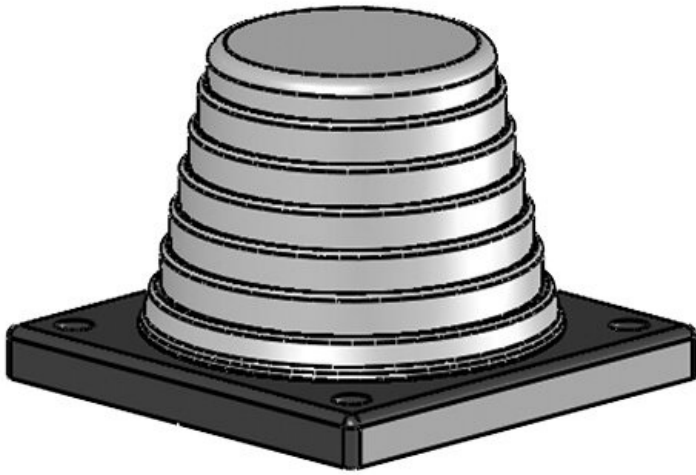

EAN	42616	88 mm
	4251269309	62 mm
	038	62 mm
	1	75,5 mm
	1	4
	68 mm	6,9 mm
	(RAL 7035)	1 x 47 - 68
		mm
	88 mm	